

## 25W EI60/25.5 FAPE6025H SERIES



### FEATURES

Frequency 50/60Hz  
 Potted under vacuum  
 Split-bobbin  
 Temperature class ta 40°C/B  
 Weight: 0.67kg  
 Packaging unit: 6 pieces [tray]

### OPTIONS

Bulk packaging is standard  
 Custom design available


### COMMON APPLICATIONS

Medical equipments  
 Industrial equipments  
 Industrial controls  
 Test equipments  
 Industrial computers  
 Avionics & telecom

### ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.	Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
FAPE602501H	230	6/4170	6.9	1	FAPE602511H	2*115	6/4170	6.9	3
FAPE602502H	230	9/2780	10.3	1	FAPE602512H	2*115	9/2780	10.3	3
FAPE602503H	230	12/2080	13.6	1	FAPE602513H	2*115	12/2080	13.6	3
FAPE602504H	230	15/1670	17	1	FAPE602514H	2*115	15/1670	17	3
FAPE602505H	230	18/1390	20.5	1	FAPE602515H	2*115	18/1390	20.5	3
FAPE602506H	230	24/1040	27	1	FAPE602516H	2*115	24/1040	27	3
FAPE602507H	230	2*6/2080	2*6.9	2	FAPE602517H	2*115	2*6/2080	2*6.9	4
FAPE602508H	230	2*9/1390	2*10.5	2	FAPE602518H	2*115	2*9/1390	2*10.5	4
FAPE602509H	230	2*12/1040	2*13.6	2	FAPE602519H	2*115	2*12/1040	2*13.6	4
FAPE602510H	230	2*15/830	2*17.3	2	FAPE602520H	2*115	2*15/830	2*17.3	4

### PHYSICAL CHARACTERISTICS

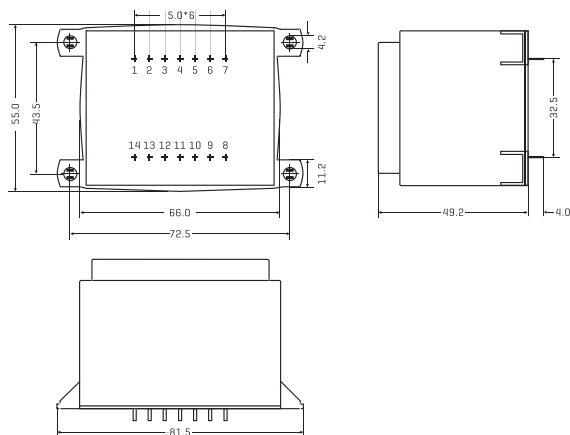

ALL DIMENSIONS IN MM

### TECHNICAL INFORMATION

