

6W UI30/10.5 FAUI3010 SERIES



FEATURES

Frequency 50/60Hz
 Potted under vacuum
 Split-bobbin
 Temperature class ta 40°C/B
 Weight: 0.175kg
 Packaging unit: 15 pieces [tray]
 Fixing material for 2.5mm [0.098 inch]
 Self-tapping screws: DIN 7513 [M 3x8]
 Sheet-metal screws: DIN 7971 [2.9x6.5]


OPTIONS

Bulk packaging is standard
 Custom design available

COMMON APPLICATIONS

Medical equipments
 Industrial equipments
 Industrial controls
 Test equipments
 Industrial computers
 Avionics & telecom


PHYSICAL CHARACTERISTICS

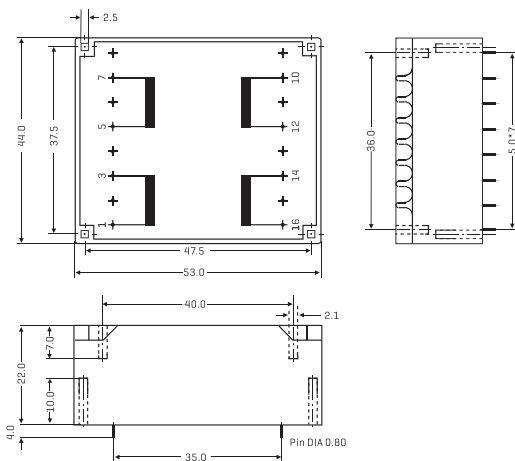

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]
FAUI301025	2*115	2*6/500	2*8.1
FAUI301026	2*115	2*9/333	2*12.1
FAUI301027	2*115	2*12/250	2*16.2
FAUI301028	2*115	2*15/200	2*20.2
FAUI301029	2*115	2*18/166	2*24.3
FAUI301030	2*115	2*24/125	2*32.3

TECHNICAL INFORMATION

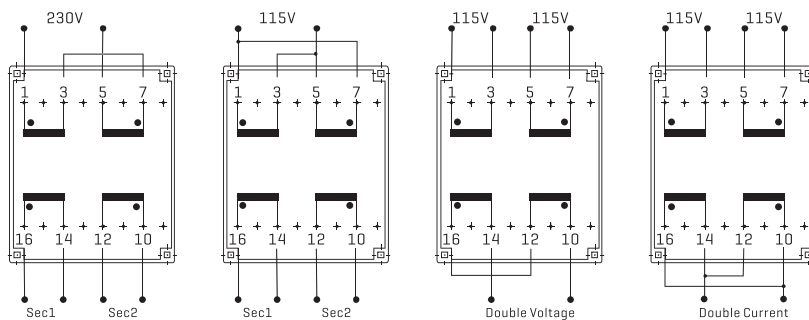

ALL DIMENSIONS IN MM