

30W UI39/21 FAUI3921 SERIES



FEATURES

Frequency 50/60Hz
 Potted under vacuum
 Split-bobbin
 Temperature class ta 40°C/B
 Weight: 0.53kg
 Packaging unit: 10 pieces (tray)
 Fixing material for 2.5mm [0.098 inch]
 Self-tapping screws: DIN 7513 [M 3x8]
 Sheet-metal screws: DIN 7971 [2.9x6.5]


OPTIONS

Bulk packaging is standard
 Custom design available

COMMON APPLICATIONS

Medical equipments
 Industrial equipments
 Industrial controls
 Test equipments
 Industrial computers
 Avionics & telecom


PHYSICAL CHARACTERISTICS



ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]
FAUI392161	2*115	2*6/2500	2*6.7
FAUI392162	2*115	2*9/1666	2*10.3
FAUI392163	2*115	2*12/1250	2*13.5
FAUI392164	2*115	2*15/1000	2*16.8
FAUI392165	2*115	2*18/833	2*20.6
FAUI392166	2*115	2*24/625	2*27.0

TECHNICAL INFORMATION

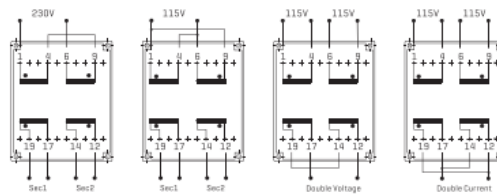

ALL DIMENSIONS IN MM