

40W UI48/17 FAUI4817 SERIES



FEATURES

Frequency 50/60Hz
 Potted under vacuum
 Split-bobbin
 Temperature class ta 40°C/B
 Weight: 0.445kg
 Packaging unit: 10 pieces (tray)
 Fixing material for: 2.5mm (0.098 inch)
 Self-tapping screws: DIN 7513 (M 3x8)
 Sheet-metal screws: DIN 7971 (2.9x6.5)


OPTIONS

Bulk packaging is standard
 Custom design available

COMMON APPLICATIONS

Medical equipments
 Industrial equipments
 Industrial controls
 Test equipments
 Industrial computers
 Avionics & telecom


PHYSICAL CHARACTERISTICS

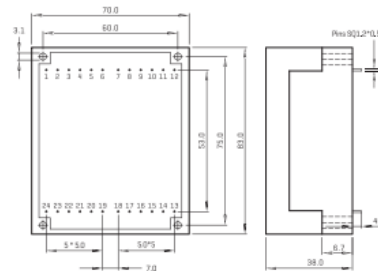

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
FAUI 481767	2*6	2*3333	2*6.7	1
FAUI 481768	2*9	2*2222	2*10.0	1
FAUI 481769	2*12	2*1667	2*13.4	1
FAUI 481770	2*15	2*1333	2*16.7	1
FAUI 481771	2*18	2*1111	2*20.1	1
FAUI 481772	2*24	2*833	2*26.8	1

TECHNICAL INFORMATION

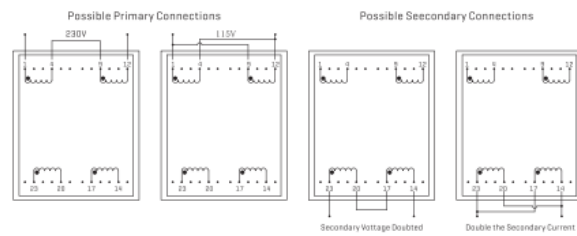

ALL DIMENSIONS IN MM