



HIGH CURRENT POWER INDUCTOR

FAPQ2012 SERIES

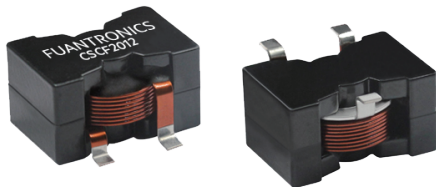

ELECTRICAL SPECIFICATION

- Assemblage design, sturdy structure
- High current, low magnetic loss, low ESR, small parasitic capacitance
- Flat wire winding, achieve a low DCR. Temperature rise current and saturation current is less influenced by environment
- Operating Temperature Range: -40°C to +125°C. (Including coilis temperature rise)
- All Parts Meet Rohs Compliance.
- Weight: App. 15.0g

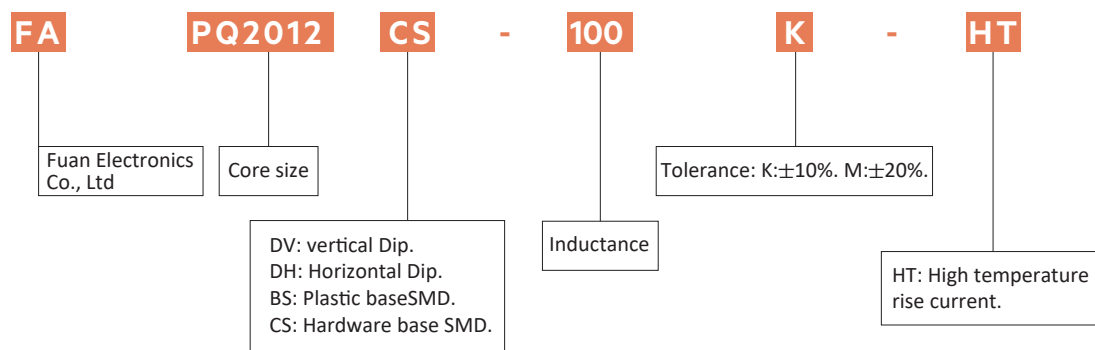

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Ind.(uH)	D.C.Resistance (mΩ)		I _{last} (A)Typical		I _{rms} (A)Typical: Δt40°C	
		Typ	Max	Drop20%	5 minutes	30 minutes	
FAPQ2012□-1R0M	1.0	1.21	1.40	85	35.0	28.0	
FAPQ2012□-1R0M-HT	1.0	0.93	1.10	85	45.0	32.0	
FAPQ2012□-1R5M	1.5	1.21	1.40	58	35.0	28.0	
FAPQ2012□-1R5M-HT	1.5	0.93	1.10	58	45.0	32.0	
FAPQ2012□-2R2M	2.2	1.21	1.40	40	35.0	28.0	
FAPQ2012□-2R2M-HT	2.2	0.93	1.10	40	45.0	32.0	
FAPQ2012□-3R3M	3.3	1.21	1.40	28	35.0	28.0	
FAPQ2012□-3R3M-HT	3.3	0.93	1.10	28	45.0	32.0	
FAPQ2012□-4R7M	4.7	1.87	2.15	25	28.0	23.0	
FAPQ2012□-4R7M-HT	4.7	1.44	1.60	25	32.0	26.0	
FAPQ2012□-6R8M	6.8	1.87	2.15	22	28.0	17.0	

Product datasheet

ELECTRICAL CHARACTERISTICS AT 25°C

Dimension in mm

Part Number	Ind.(uH)	D.C.Resistance (mΩ)		last (A)Typical	I _{rms} (A)Typical: ^Δ t40°C	
		Typ	Max	Drop20%	5 minutes	30 minutes
FAPQ2012□-8R2M	8.2	3.44	4.00	19	22.0	17.0
FAPQ2012□-100K	10	3.44	4.00	16	22.0	17.0
FAPQ2012□-150K	15	8.33	10.0	14	13.0	12.0
FAPQ2012□-220K	22	8.33	10.0	10	13.0	12.0
FAPQ2012□-330K	33	8.33	10.0	7	13.0	12.0


TEST CONDITIONS:

- 1.All data is tested based on 25°C ambient temperature.
- 2.Inductance measure condition at 100KHz 0.1V.
- 3.Temperature rise current: the actual value of DC current when the temperature rise is T40°C(Ta=25°C).
- 4.Special remind: Circuit design,component planement,PWB size and thickness,cooling system and etc.all will affect the product temperature.Please verify the product temprure in the final application..


ELECTRICAL INFORMATION

Dimension in mm


2012CS




Top view



Side view




Bottom view

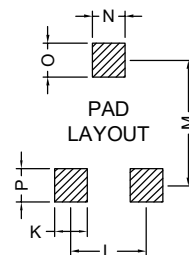


PAD LAYOUT

A	22.5 Max	I	2.50±0.50
B	21.8 Max	J	2.50±0.20
C	7.00±0.60	K	5.00 REF
D	2.50±0.20	L	9.50 REF
E	14.0±0.50	M	19.3 REF
F	12.5 Max	N	5.00 REF
G	2.00 REF	O	5.00 REF
H	0-0.15	P	5.00 REF


2012DV




Top view



Side view



Bottom view



PAD Layout


A	16.0 Max	I	4.50 REF
B	21.8 Max	J	9.50 REF
C	7.00±0.60	K	5.00 REF
D	2.50±0.20	L	1.50 REF
E	9.50±0.50		
F	4.50±0.50		
G	12.5 Max		
H	3.50±0.50		

Product datasheet


ELECTRICAL INFORMATION

Dimension in mm


2012DH-P1




Top view



Side view




Bottom view




A	22.5 Max	I	3.50±0.50
B	21.8 Max	J	2.50±0.20
C	7.00±0.60	K	5.00 REF
D	2.50±0.20	L	9.50 REF
E	14.0±0.50	M	17.5 REF
F	12.5 Max	N	5.00 REF
G	2.00 REF	O	5.00 REF
H	0-0.15	P	1.50 REF


2012DH-P2




Top view



Side view





Bottom view



A	22.5 Max	I	3.50±0.50
B	21.8 Max	J	2.50±0.20
C	7.00±0.60	K	5.00 REF
D	2.50±0.20	L	9.50 REF
E	14.0±0.50	M	15.0 REF
F	12.5 Max	N	5.00 REF
G	2.00 REF	O	1.50 REF
H	2.50±0.50	P	1.50 REF









CURRENT VS TEMPERATURE RISE

(Temperature rise current is 30 minutes)

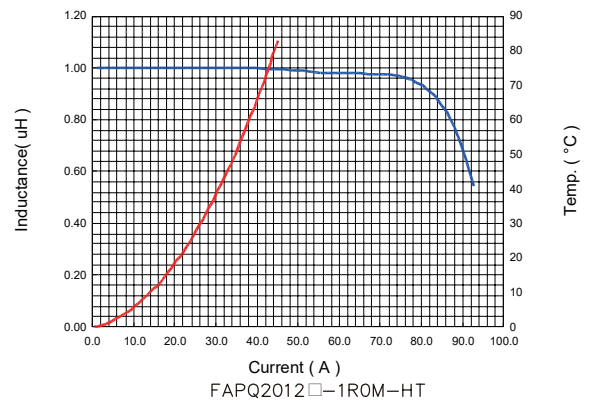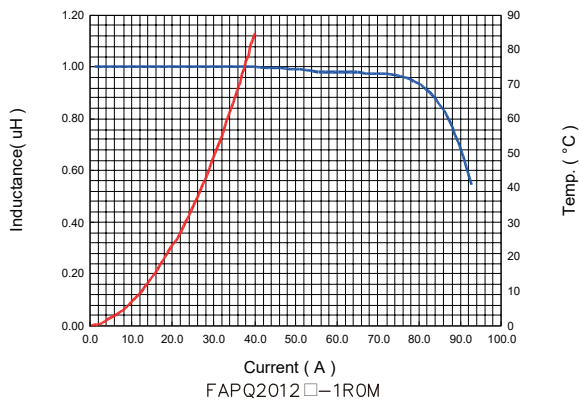

CURRENT VS TEMPERATURE RISE

(Temperature rise current is 30 minutes)

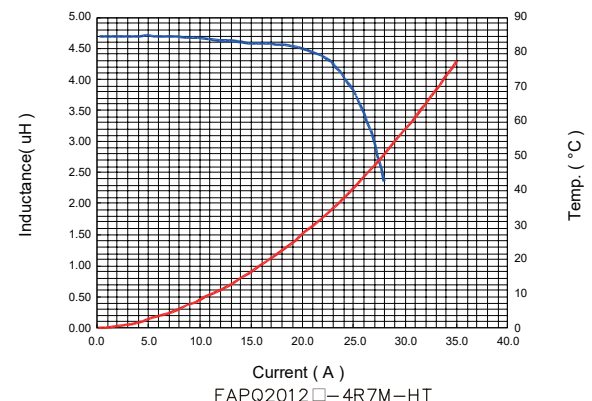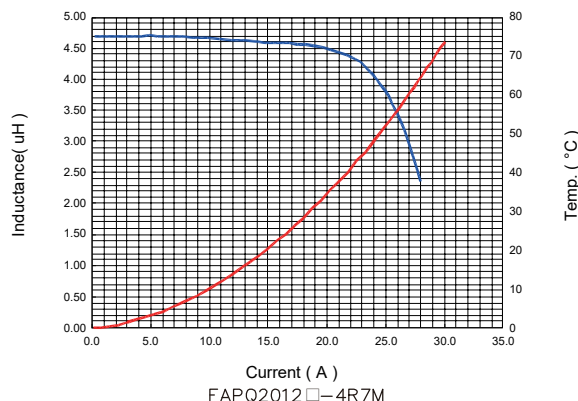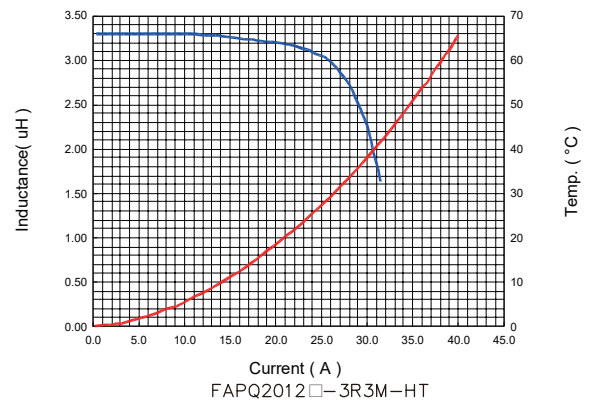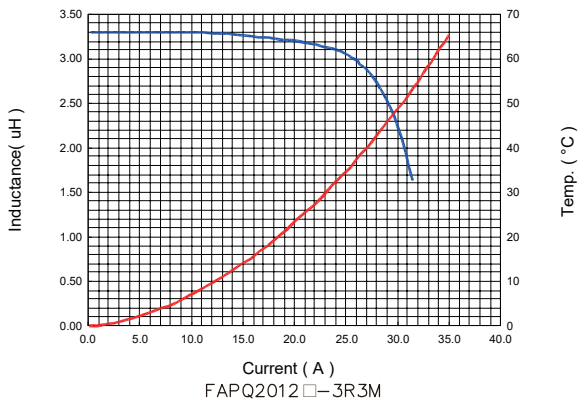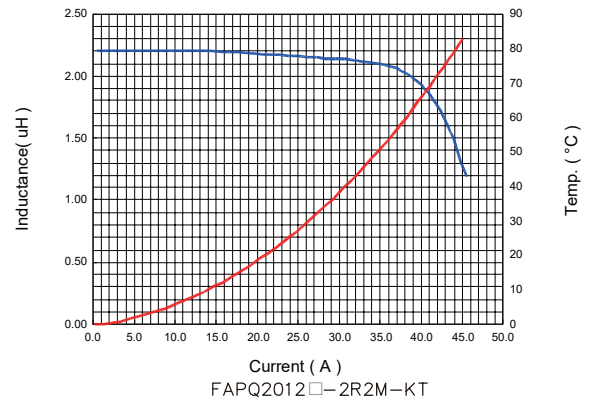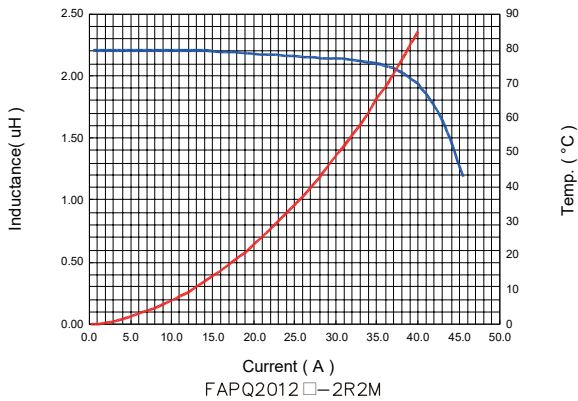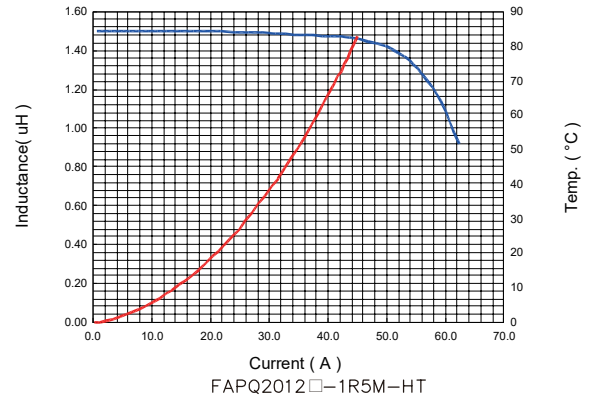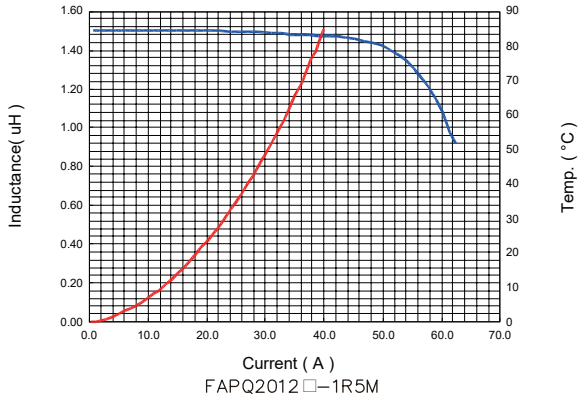

Product datasheet

CURRENT VS TEMPERATURE RISE

(Temperature rise current is 30 minutes)

